
655-685W

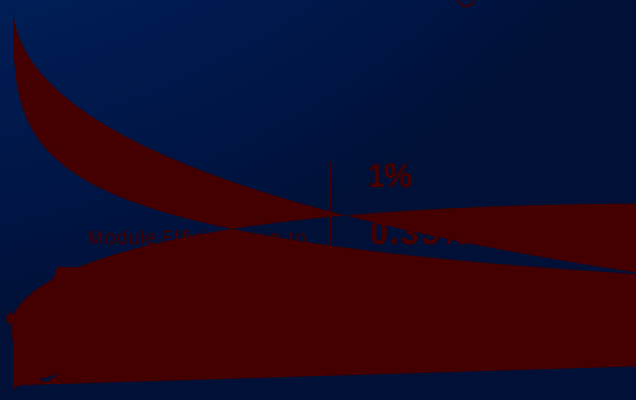


- Operating Temperature -40°C ~ +85°C
- Power Tolerance 0~+3%
- Junction Box IP68
- NOCT 45±2
- Maximum Series Fuse Rating 30A
- Bifacial Factor 70±5%
- Maximum System Voltage 1500V(IEC)

Mechanical Parameters

Engineering Drawings

Front Side Back

* L:±2mm W:±2mm Unit:mm

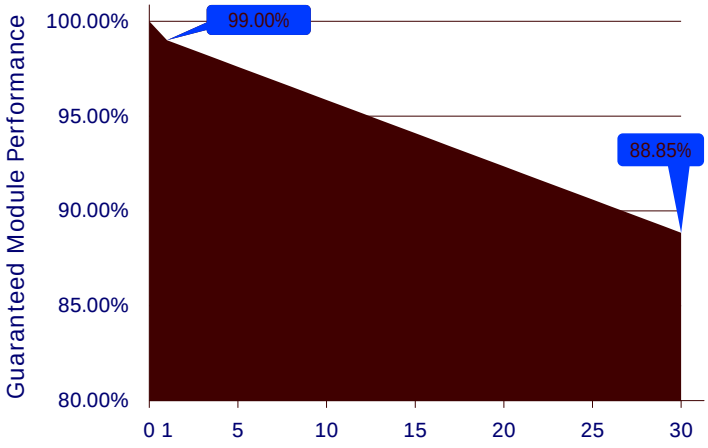

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.05%/
Temperature Coefficient of Voc	-0.22%/
Temperature Coefficient of Pmax	-0.26%/

Mechanical Loading

Front Side Maximum Static Loading	
Rear Side Maximum Static Loading	
Hailstone Test	25 mm diameter hail at 23 m/s

Gokin

Gokin Solar Co., Ltd.
https://www.gokinsolar.com
gk@gokinsolar.com