
TÜVRheinland

- Operating Temperature -40℃ ~ +70℃
- Power Tolerance 0~+3%
- Junction Box IP68
- NOCT 45±2
- Maximum Series Fuse Rating 30A
- Maximum System Voltage 1500V(IEC)

Front Side Back

GBC

108 6×18

Dual glass, 2.0+2.0mm coated semi tempered glass

Black anodized aluminum

TüV 1×4mm2, (+)300mm, (-)200mm
or Customized Length


MC4 Compatible/MC4-Evo2

36 pcs per pallet
216 pcs per 20' GP, 864 pcs per 40' HC

Class II

IEC Class C

* L:±2mm W:±2mm Unit:mm

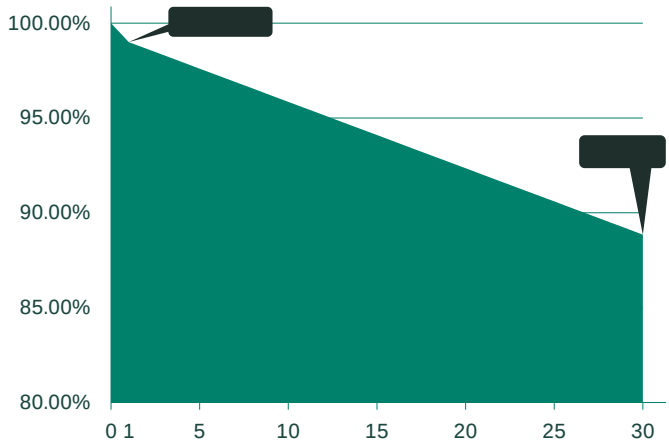

Temperature Coefficient of Isc	+0.05%/
Temperature Coefficient of Voc	-0.22%/
Temperature Coefficient of Pmax	-0.26%/

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25 mm diameter hail at 23 m/s