

- Operating Temperature -40℃ ~ +70℃
- Power Tolerance 0~+3%
- Junction Box IP68
- NOCT 45±2
- Maximum Series Fuse Rating 30A
- Maximum System Voltage 1500V(IEC)

Front Side Back

GBC

108 6×18

Dual glass, 2.0+2.0mm coated semi tempered glass

Black anodized aluminum

TüV 1×4mm2, (+)300mm, (-)200mm
or Customized Length


MC4 Compatible/MC4-Evo2

36 pcs per pallet
216 pcs per 20’ GP, 864 pcs per 40’ HC

Class II

IEC Class C

* L:±2mm W:±2mm Unit:mm

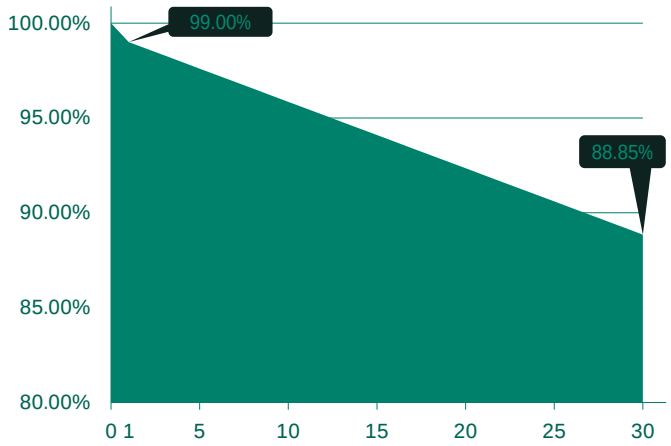


| | |
|---|---|
| Temperature Coefficient of Isc | +0.05%/ |
| Temperature Coefficient of Voc | -0.22%/ |
| Temperature Coefficient of Pmax | -0.26%/ |

| | |
|---|---|
| Front Side Maximum Static Loading | 5400Pa |
| Rear Side Maximum Static Loading | 2400Pa |
| Hailstone Test | 25 mm diameter hail at 23 m/s |