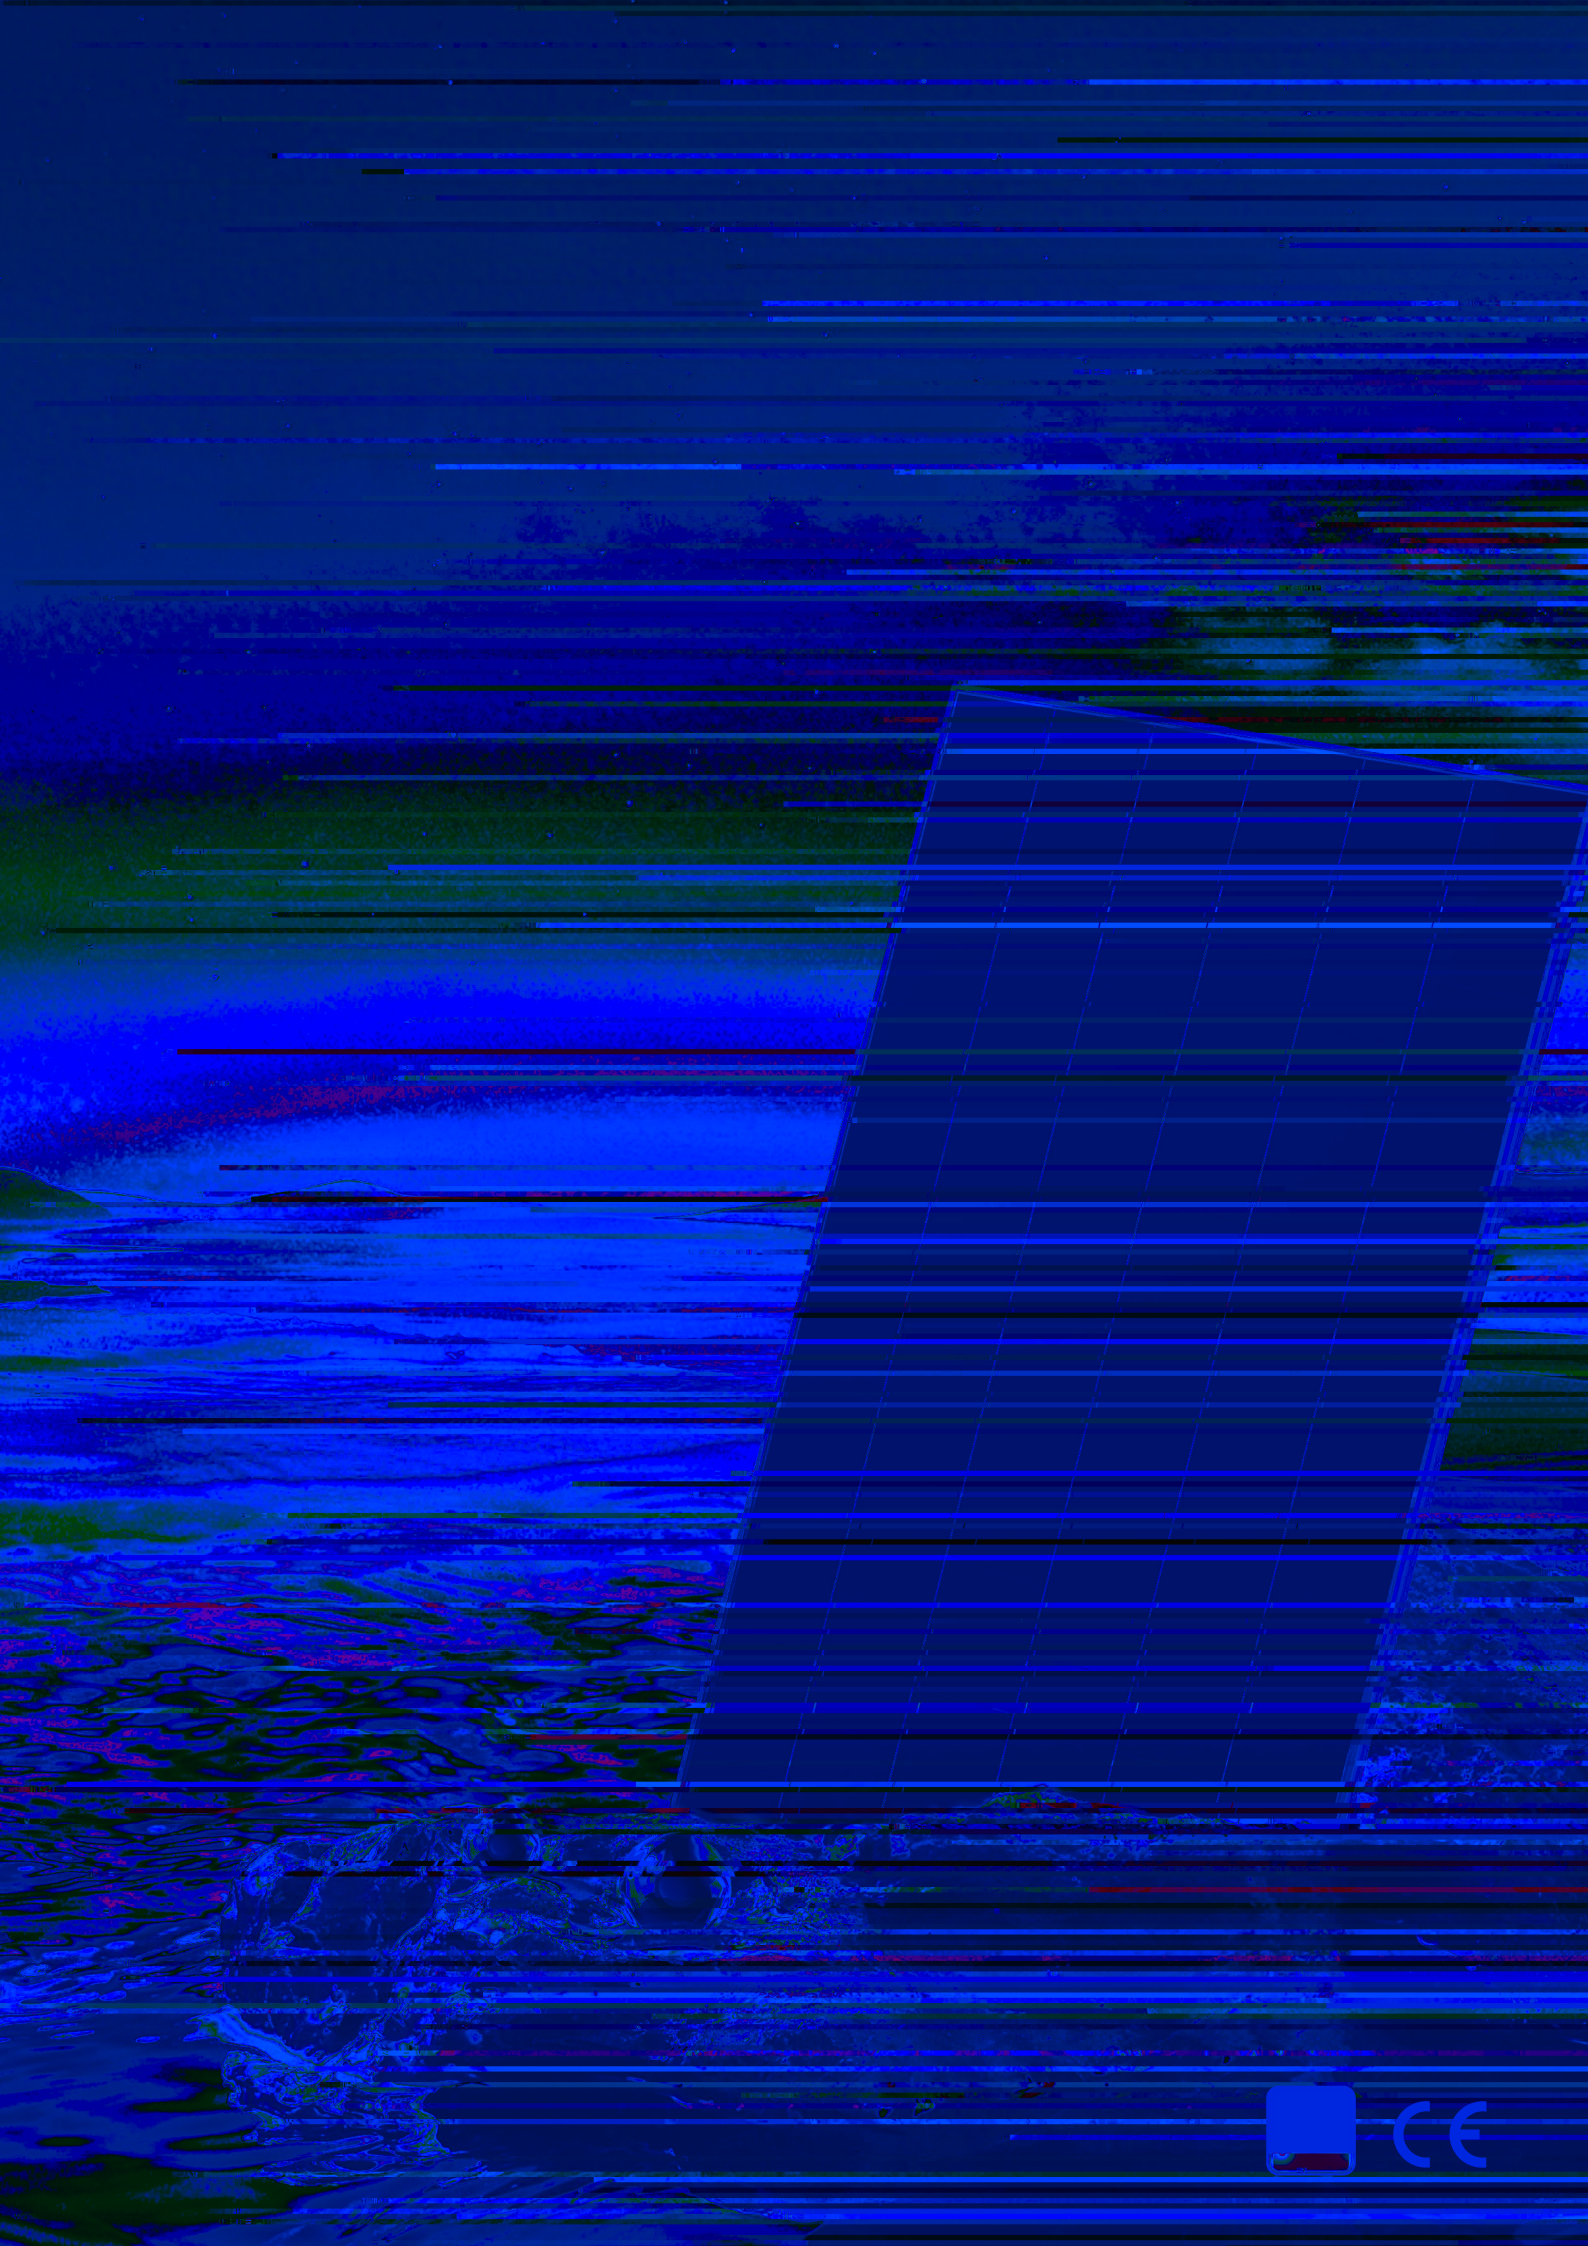


5400Pa

Maximum Series Fuse Rating

## Mechanical Parameters

| | |
|---|---|
| | GBC |
| | 108 6×18 |
| | Dual glass, 2.0+2.0mm coated semi tempered glass |
| | Black anodized aluminum |
| | TüV 1×4mm2, (+)300mm, (-)200mm<br>or Customized Length |
| | MC4 Compatible/MC4-Evo2 |
| | 37 pcs per pallet<br>222 pcs per 20’ GP, 888 pcs per 40’ HC |
| | Class II |
| | IEC Class C |

## Engineering Drawings

Front Side Back

* L:±2mm W:±2mm Unit:mm